


Stufen-Trafo TDM S

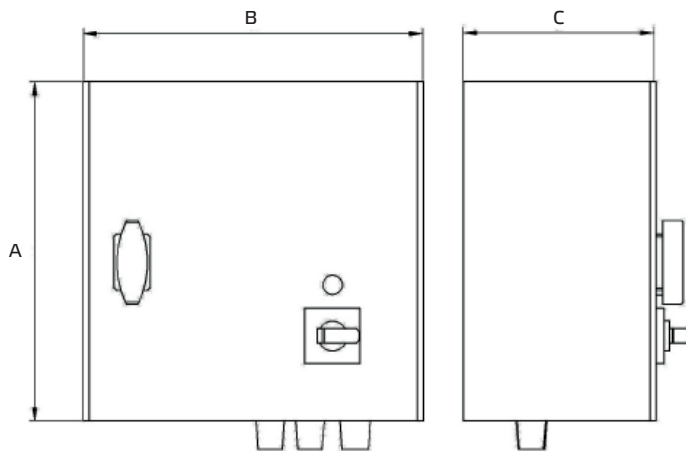

Typ	ID	I _{max.} A	A mm	B mm	C mm	D mm	E mm	Gewicht kg
TDM 025S	111575	2,5	325	300	175	255	255	12,5
TDM 040S	111576	4,0	425	300	175	255	355	18,1
TDM 060S	111577	6,0	425	300	235	255	355	21,8
TDM 080S	111578	8,0	425	300	235	255	355	27,0
TDM 110S	111579	11,0	430	400	235	355	355	36,6


- Stufen-Trafo TDM S
- 400 V 3~, 50/60 Hz
- Mit Motorschutz
- Anschluss für Stellantrieb
- Aufputzmontage
- Metallgehäuse
- Max. Umgebungstemperatur 35 °C
- Schutzart IP 54

Typ	Ausgangsspannungen U _A V				
	1	2	3	4	5
TDM 025S	130	180	230	300	400
TDM 040S	130	180	230	300	400
TDM 060S	130	180	230	300	400
TDM 080S	130	180	230	300	400
TDM 110S	130	180	230	300	400

Schaltplan :



Montage :



Legende

- U_A = Ausgangsspannung
 I_{max.} = Max. Betriebsstrom