



Stufen-Trafo TEM S

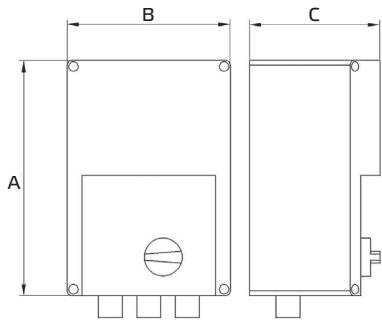

TEM 035S, TEM 050S
Kunststoffgehäuse

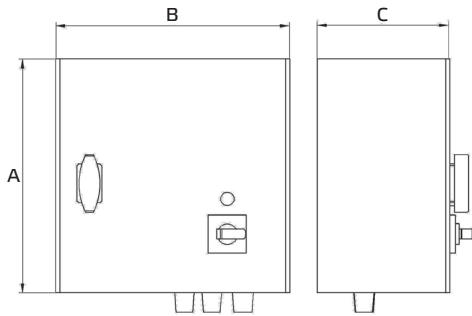

TEM 075S, TEM 100S, TEM 130S
Metallgehäuse




| Typ | ID | I _{max.} A | Sicherung A | A mm | B mm | C mm | D mm | E mm | Gewicht kg |
|----------|--------|------------------------|----------------|---------|---------|---------|---------|---------|---------------|
| TEM 035S | 111582 | 3,5 | 5,0 | 255 | 170 | 140 | 155 | 194 | 4,6 |
| TEM 050S | 111583 | 5,0 | 8,0 | 255 | 170 | 140 | 155 | 194 | 5,3 |
| TEM 075S | 109729 | 7,5 | 12,5 | 305 | 200 | 140 | 183 | 236 | 7,8 |
| TEM 100S | 110763 | 10,0 | 16,0 | 325 | 300 | 185 | 255 | 255 | 12,6 |
| TEM 130S | 111584 | 13,0 | 18,0 | 325 | 300 | 185 | 255 | 255 | 15,1 |


- Stufen-Trafo TEM S
- 230 V ~, 50/60 Hz
- Mit Motorschutz
- Anschluss für Stellantrieb
- Aufputzmontage
- Max. Umgebungstemperatur 35 °C
- Schutzart IP 54

| Typ | Ausgangsspannungen U _A V | | | | |
|----------|--|-----|-----|-----|-----|
| | 1 | 2 | 3 | 4 | 5 |
| TEM 035S | 110 | 140 | 170 | 200 | 230 |
| TEM 050S | 110 | 140 | 170 | 200 | 230 |
| TEM 075S | 110 | 140 | 170 | 200 | 230 |
| TEM 100S | 110 | 140 | 170 | 200 | 230 |
| TEM 130S | 110 | 140 | 170 | 200 | 230 |

Schaltplan :

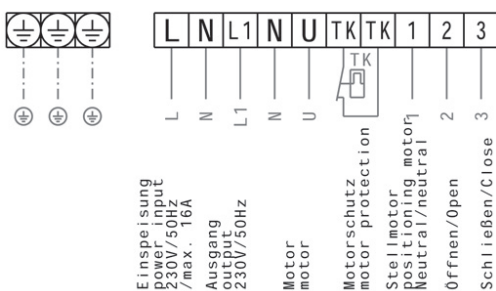

Montage :



- Legende**
- U_A = Ausgangsspannung
 - I_{max.} = Max. Betriebsstrom