


7-Stufen-Trafo TDS

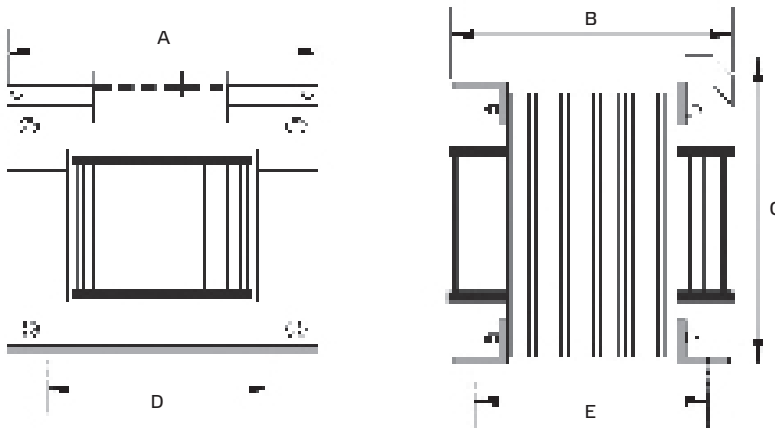


Typ	ID	$I_{max. A}$	A mm	B mm	C mm	D mm	E mm	Gewicht kg
TDS 025	113663	2,5	108	100	112	90	75	7,2
TDS 040	113666	4,0	120	120	122	100	92	13,4
TDS 060	113667	6,0	135	128	135	113	97	14,8
TDS 080	113668	8,0	150	140	144	125	105	19,6
TDS 110	113670	11,0	150	163	144	125	131	28,0

- 7-Stufen-Trafo TDS
- 400 V 3~, 50/60 Hz
- Ohne Motorschutz, für V-Schaltung (Schaltschrank)
- Max. Umgebungstemperatur 35 °C
- Schutzart IP 20

Typ	Ausgangsspannungen U_A V					
	1	2	3	4	5	6
TDS 025	130	170	220	260	300	400
TDS 040	130	170	220	260	300	400
TDS 060	130	170	220	260	300	400
TDS 080	130	170	220	260	300	400
TDS 110	130	170	220	260	300	400

Schaltplan :

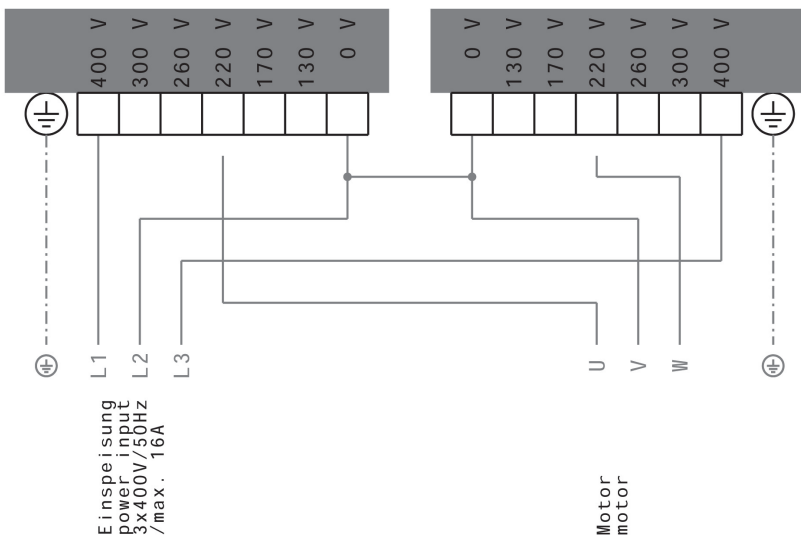

Legende

- U_A = Ausgangsspannung
- $I_{max.}$ = Max. Betriebsstrom