
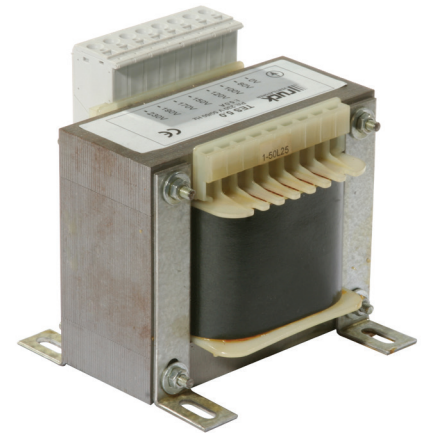


7-Stufen-Trafo TES

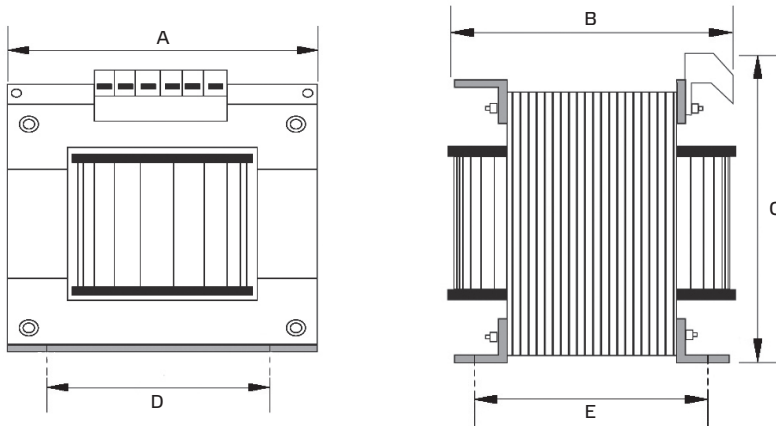


| Typ | ID | $I_{max. A}$ | A* mm | B* mm | C* mm | D* mm | E* mm | Gewicht kg |
|----------|--------|--------------|-------|-------|-------|-------|-------|------------|
| TES 0145 | 111858 | 1,45 | 78 | 67 | 80 | 56 | 54 | 1,4 |
| TES 035 | 103954 | 3,5 | 108 | 90 | 112 | 90 | 66 | 3,2 |
| TES 050 | 103955 | 5,0 | 108 | 100 | 112 | 90 | 75 | 4,0 |
| TES 075 | 103957 | 7,5 | 120 | 120 | 122 | 100 | 92 | 5,9 |
| TES 100 | 103958 | 10,0 | 135 | 128 | 135 | 113 | 92 | 7,6 |
| TES 130 | 103959 | 13,0 | 150 | 140 | 144 | 125 | 105 | 9,8 |

*max.

- 7-Stufen-Trafo TES
- 230 V ~, 50/60 Hz
- Ohne Motorschutz
- Schaltschrankeinbau
- Max. Umgebungstemperatur 35 °C
- Schutzart IP 20

| Typ | Ausgangsspannungen U_A V | | | | | | |
|----------|----------------------------|-----|-----|-----|-----|-----|-----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| TES 0145 | 80 | 100 | 125 | 150 | 175 | 190 | 230 |
| TES 035 | 80 | 100 | 140 | 160 | 180 | 200 | 230 |
| TES 050 | 80 | 100 | 140 | 160 | 180 | 200 | 230 |
| TES 075 | 80 | 100 | 140 | 160 | 180 | 200 | 230 |
| TES 100 | 80 | 100 | 140 | 160 | 180 | 200 | 230 |
| TES 130 | 80 | 100 | 140 | 160 | 180 | 200 | 230 |

Schaltplan :

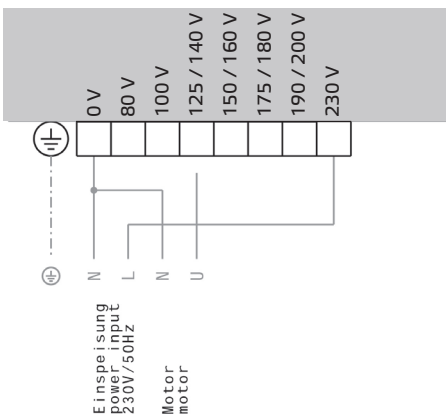

Legende

- U_A = Ausgangsspannung
 $I_{max.}$ = Max. Betriebsstrom